

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
WO 2004/006701 A1

- (51) International Patent Classification<sup>7</sup>: A41D 13/015 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/GB2002/003223
- (22) International Filing Date: 12 July 2002 (12.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): BODY-CARE LIMITED [GB/GB]; Kennet Cottage, Kempsford, Gloucestershire GL7 4EQ (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): ASPRAY, Matthew [GB/GB]; Kennet Cottage, Kempsford, Gloucestershire GL7 4EQ (GB).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published: — with international search report
- (74) Agent: BAILEY, Richard, Alan; A R Davies & Co., 27 Imperial Square, Cheltenham GL50 1RQ (GB).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: PERSONAL PROTECTION DEVICE

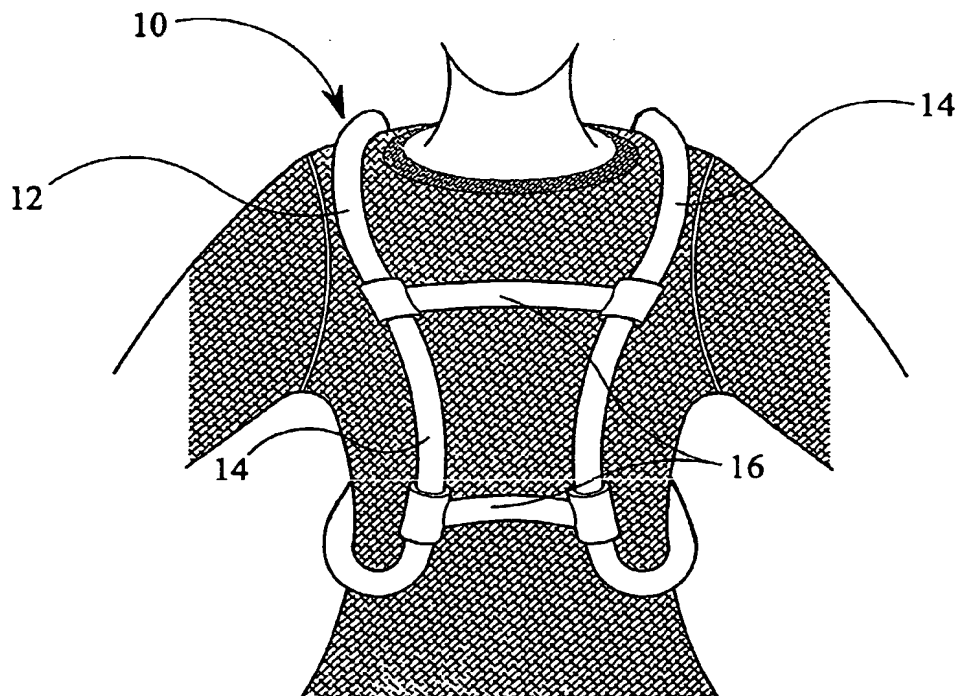

(57) Abstract: A personal protection device (10) comprises a resilient structure (12) which, in use, surrounds a bodypart of the user. The energy from an impact by a first surface is thus transmitted through the structure (12) from the impact side to the other side(s) and dissipated to an external second surface with which the structure (12) is in contact.